



NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK






Ordering Information

1310-22 XX XX M XXX XX X

No. of Pins Contact Plating Pin Length Series No.
 Per Row:02-50 G0=Gold Flash L=B+C+D-W_{4,22} 1=Type 1
 G3=0u"Gold Standard: 2=Type 2
 G4=15u"Gold
 G5=50u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Item	Pin Length	W	D	B	C	Mating
Standard	---	5.50	0.10	1.90	---	2321
	---	5.50	0.10	3.00	---	2334
Alternate	---	5.50	0.10	4.00	---	2344

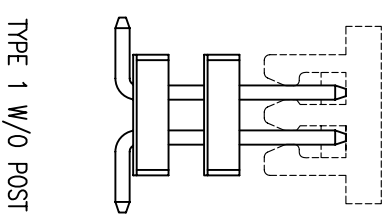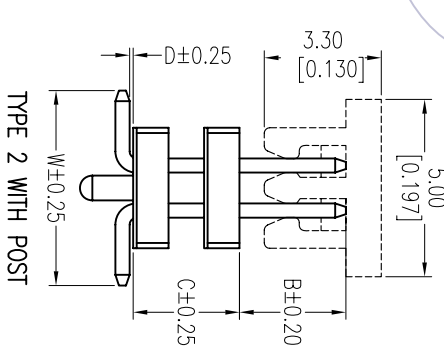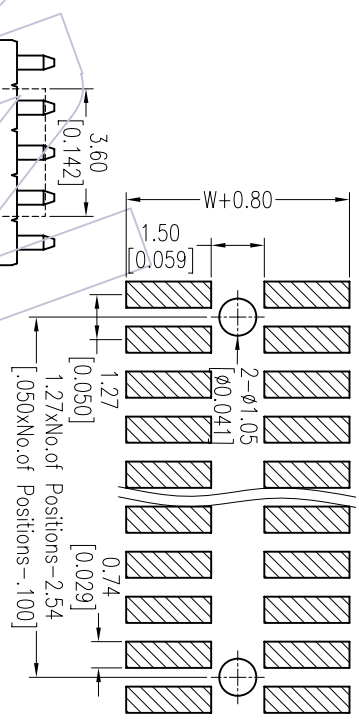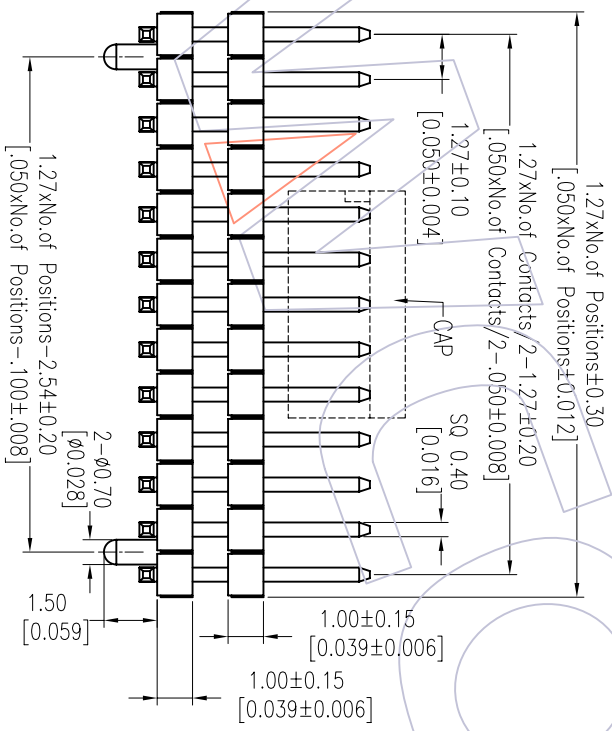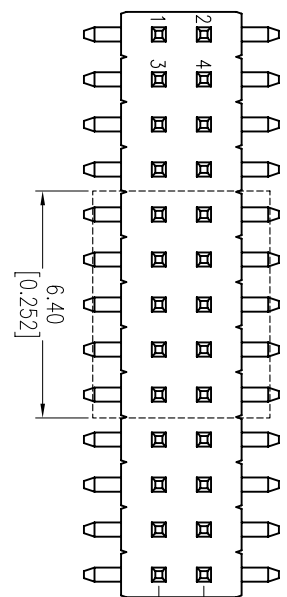

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/03/13	NEW

OPERATION	DRAW	DATE
XX	William Diao	2012.03.13
XX	CHECK	DATE
XX	APPROVE	DATE

SCALE	UNIT	FIT	PART NO.
XX	mm	1/1	1310-22XXXXMXXXXX
XX	A4	PROJ.	

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com