



NOTES:  
 Rated Current:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40℃ to +105℃





Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK

## Ordering Information

1425-12 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length(short) Packing  
 Per Row:G2-50 G0=Gold Flash L=A+B+D+3.8 A=Tray  
 G3=10u"Gold Standard:10=10.6 T=Tube  
 G4=15u"Gold 14=14.0  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Item	Pin Length	A	D	B	Mating
Standard	10.60	2.80	1.20	2.80	2446
Alternate	14.00	3.00	1.20	6.00	2485

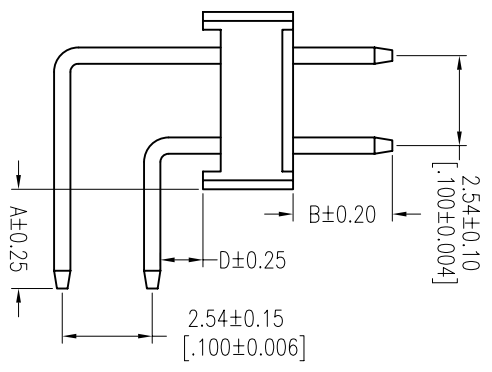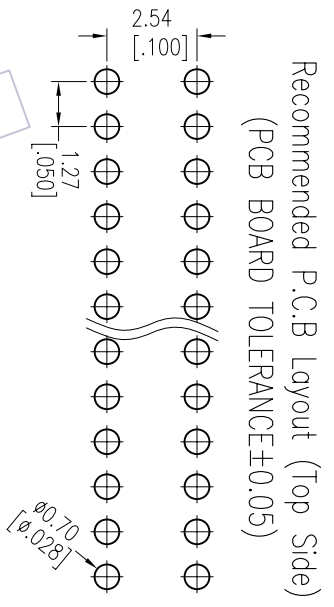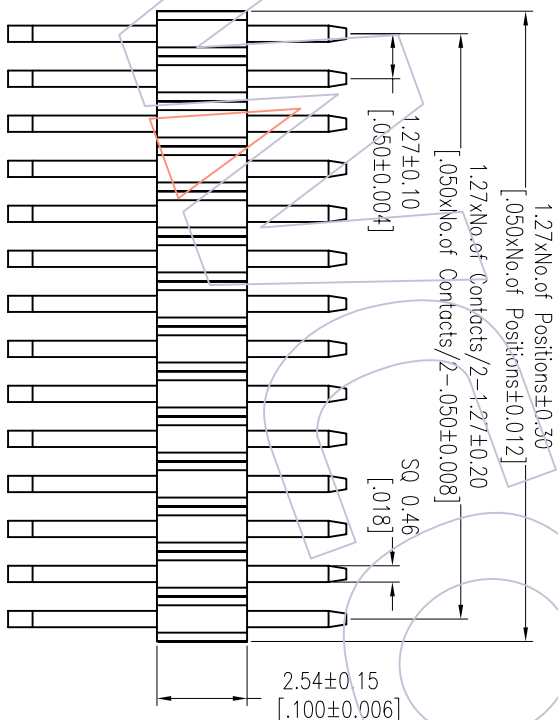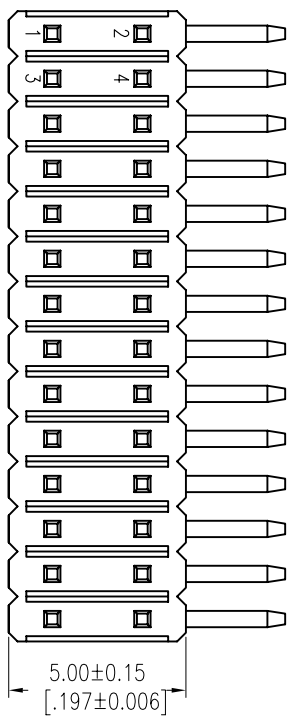

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/04/06	NEW	-----	XX.XX ±0.40	<i>William Diao</i>	2012.04.06	mm	1425-12XXXXRXXXXX	PH1.27*2.54 DUAL ROW 90° CONCAVE BENDING H=2.54	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	XX.XX ±0.25	CHECK	DATE	UNIT				
				XX.XXX ±0.15	APPROVE	DATE	SIZE				
				Angle ± 3°			SHEET				
				DIM TOL			1/1				



Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com