



NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material:Phosphor Bronze
 Contact plating:Au Or Sn over Ni
 Insulator Material:PA9T+30%GF UL94V-0

Ordering Information

2344-2 XX M XX CUN X 3


No. of Pins per Row: 02-50Pin

Contact Plating:
 G0=Gold Flash
 G3=10µ Gold
 G4=15µr Gold
 G5=30µr Gold
 S0=Gold Flash/Tin
 S3=10µr Gold/Tin
 S4=15µr Gold/Tin
 S5=30µr Gold/Tin
 SN=Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

| Item | Pitch | Mating |
|-----------|-------|-------------------------------|
| Standard | 1.27 | 1310/1315/1320/3131/3133/3100 |
| Alternate | | |

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

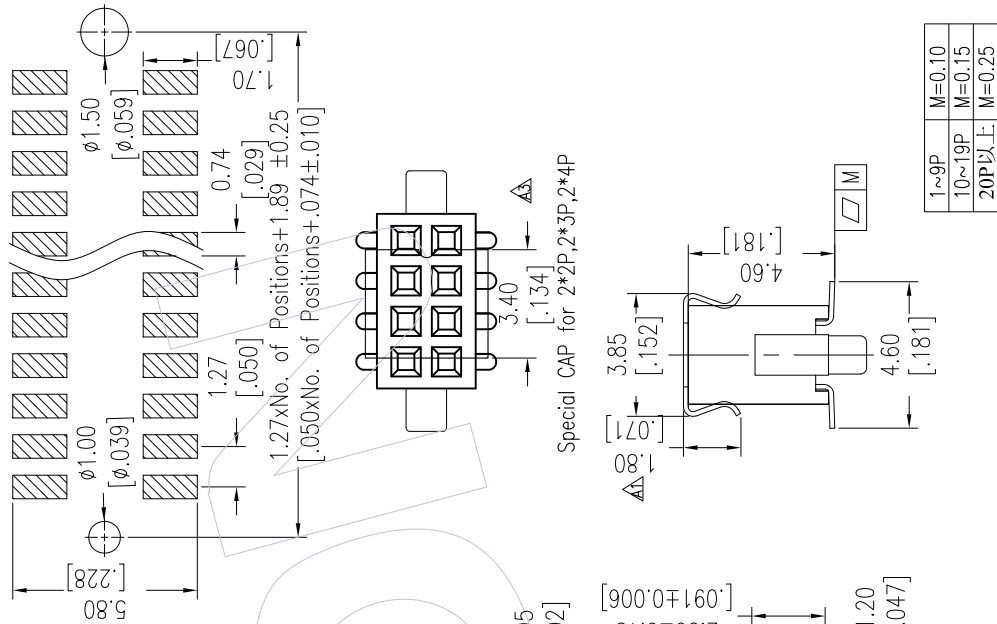

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 E-mail: sales@wcon.com E-mail: salesk@wcon.com

| | |
|--------------|---|
| PART NO. | 2344-2XXMXXCUNX3 |
| TITLE: | FH1.27mm DUAL SMT WITH DIFFERENT POSITION |
| Customer NO. | H=4.30 |

| | | | | |
|-------|-----|------------|-------------|---------|
| SCALE | FIT | DATE | OPERATION | DRAW |
| UNIT | mm | 2016/06/17 | x.x ±0.40 | Wang |
| SIZE | A4 | DATE | x.xx ±0.25 | CHECK |
| SHEET | 1/1 | DATE | x.xxx ±0.15 | APPROVE |
| PROJ. | | | Angle ± 3' | |
| | | | DIM TOL | |

| | |
|-------------|--|
| CHANGE | |
| DESCRIPTION | |

| | |
|-----------------|------|
| Modify CAP 3.00 | 3.40 |
| Modify CAP | |
| Modify cap 2.00 | 1.80 |

| REV | DATE | MODIFICATION | DESCRIPTION |
|-----|------------|-----------------|-------------|
| A3 | 2016/06/17 | Modify CAP 3.00 | 3.40 |
| A2 | 2014/12/30 | Modify CAP | |
| A1 | 2013/08/21 | Modify cap 2.00 | 1.80 |
| A0 | 2012/07/09 | NEW | |

| | | | |
|-----|------|--------------|-------------|
| REV | DATE | MODIFICATION | DESCRIPTION |
| | | | |

SECTION A-A