

# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE ±0.05)

NOTES:  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA9T+30%GF UL94V-0


## Ordering Information

2344-2 XX C XX CUN T 1

No. of Pins per Row: 02-50Pin  
 Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin

Packing:  
 T=Tube

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

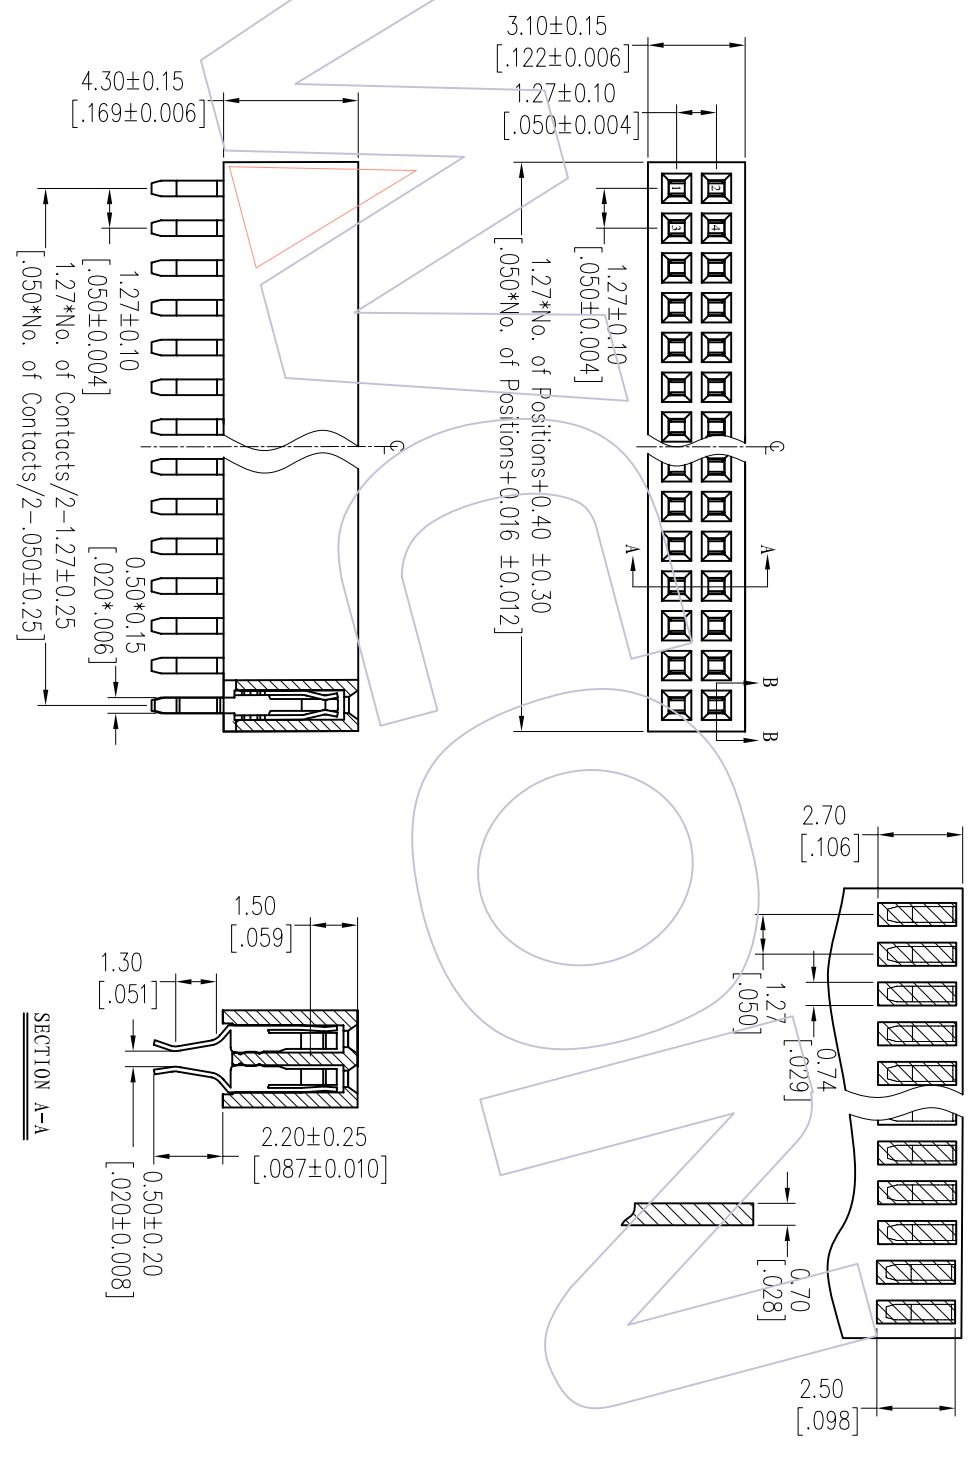

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	<b>WCON</b> Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/07/09	NEW		XX	JYHuogng	2012/07/09	mm	A4	2344-2XXCXCUN T1	FH1. 27mm DUAL SPLINT H=4. 3mm	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	SIZE	SHEET	Customer NO.		
				± 3°	APPROVE	DATE	1/1				
				DIW	TOL						