

NOTES:


Current Rating: 1.0AMP
 Voltage Rating: 50V AC/DC
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Operation Temperature: -25°C to +85°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: Thermoplastic (UL94V-0)

Ordering Information

WF1256- WM XX E R 1

WM: 180° SMT No of Pins R=Tape&Reel Package

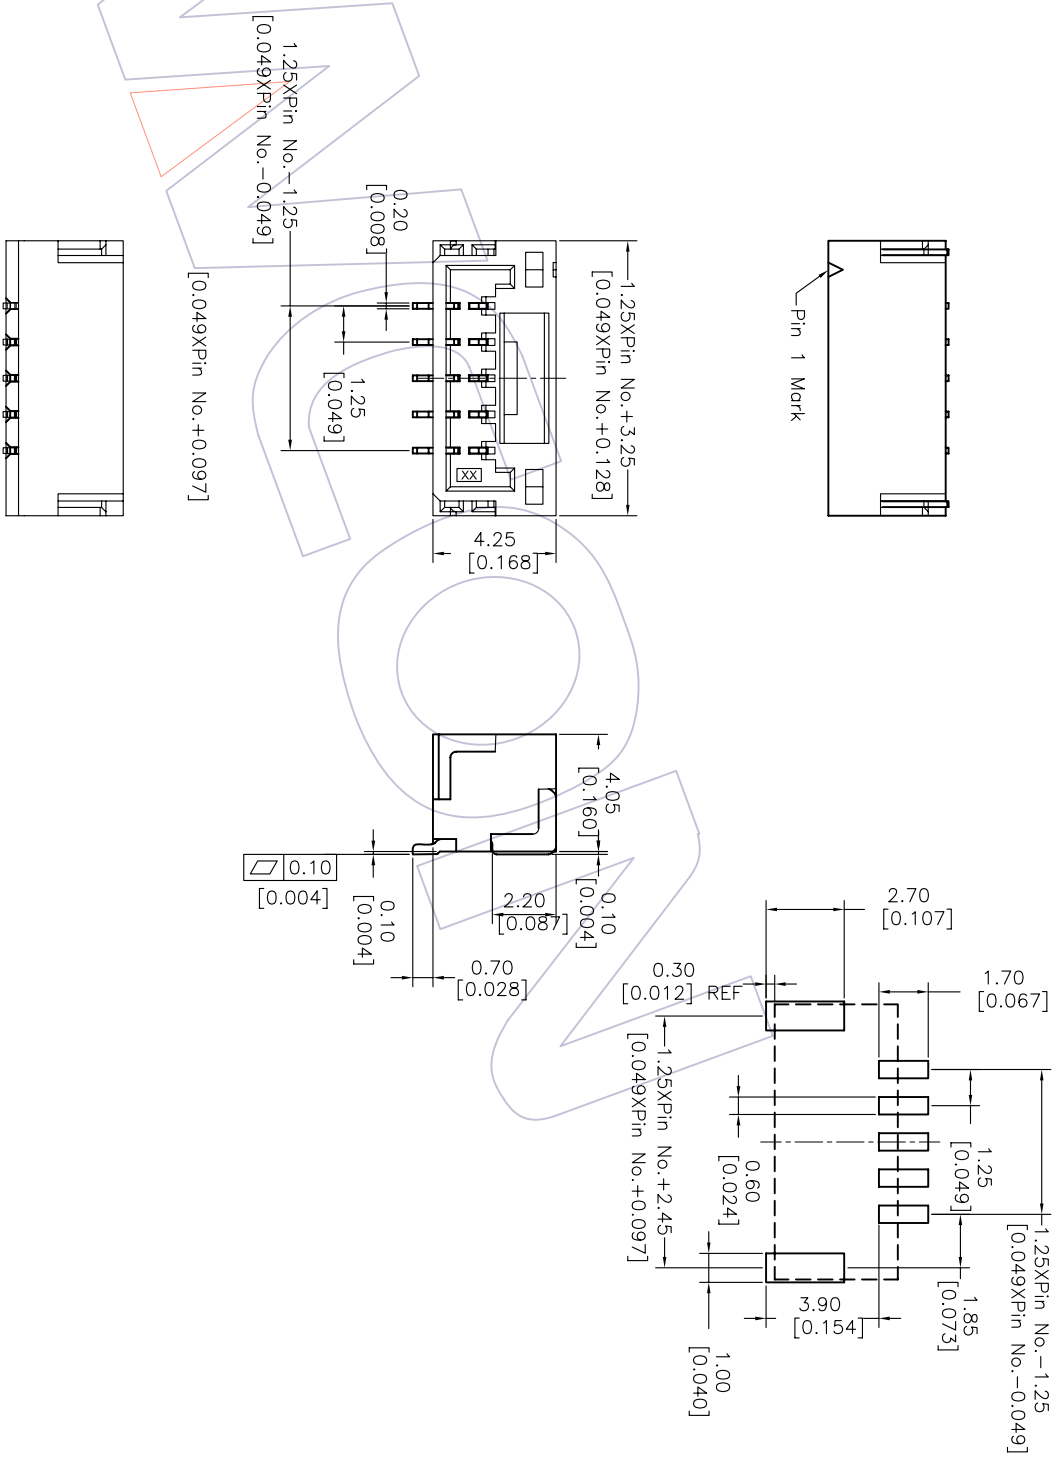

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Tang	SCALE	UNIT	PART NO.	TITLE:
A0	2011/04/14	NEW			X.X ±0.40	DESIGN	2011/04/14	Fit	mm	WF1256-WMXXER1	1.25 WAFER 5PIN 180° SMT TYPE
					X.XX ±0.25	CHECK		A4			
					Angle ± 3°	APPROVE		1/1			
					DIM	PROJ.				Customer NO.	

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO. LTD