

HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0

Ordering Information

2243N-2 XX M XX CUN T X

No. of Pins per Row: 02-40Pin



Contact Plating:

G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Mate Tin

Packing:

T=Tube
 P=Tube+CAP
 R=Tube&Reel+CAP

Series No.
 3=Type 1
 4=Type 2

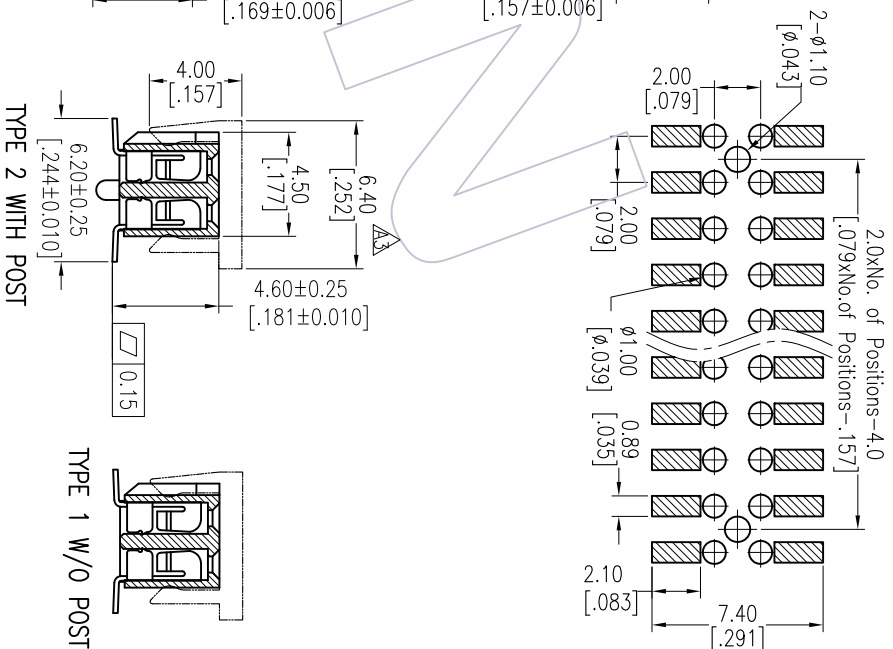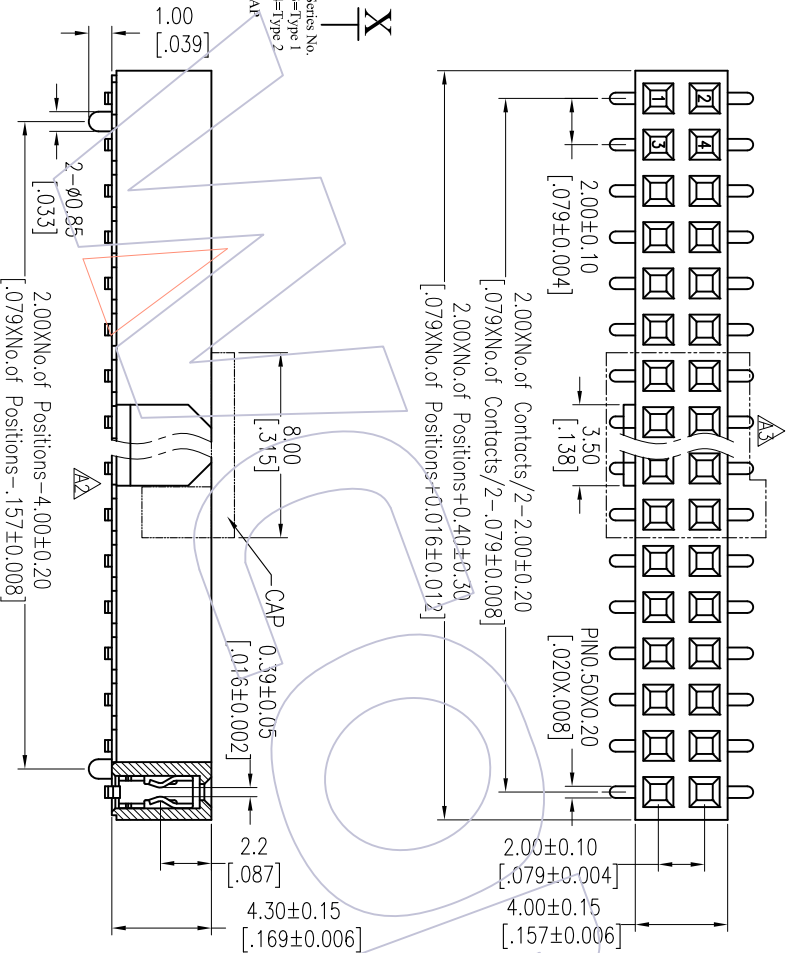

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Item	Pitch	Mating
Standard	2.00	1215/1220/3111
Alternate		

A3	2016/07/07	Modify	The CAP
A2	2014/04/11	Modify	Drawing
A1	2013/07/24	Modify	The CAP
AO	2012/07/12	NEW	
REV	DATE	MODIFICATION DESCRIPTION	

OPERATION	±0.40	DRAW	wang
	±0.25		CHECK
Angle	± 3°	APPROVE	DATE
DIM	TOL	PROJ.	SCALE

PART NO.	2243N-2XXMXXCUNT3/4
TITLE:	FH2.00 DUAL ROW 180°SMT H=4.3 W=4.0 WITH BUMP
Customer NO.	

TITLE	PART NO.
TYPE 1	2243N-2XXMXXCUNT3
TYPE 2	2243N-2XXMXXCUNT4

WCON

WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com