

HSF


NOTES:

Rated Current:18.0 AMP
 Contact Resistance:8.0 milliohm Max
 Withstand Voltage:2000 V AC/DC
 Insulation Resistance:1000 Megohm min
 Operation Temperature:-40°C to +105°C
 Housing Material:PA66+30%GF(UL94V-0)
 Contact Material:Brass
 Terminal Plating:
 Matte Tin Plated Over Nickel


Ordering Information:

P M 750- 1 S XX A SM 2



M=Male Pitch No. of Pins Color Contact Plated Series No.
 750=7.50 02-20P A=Green SM=Male Tin

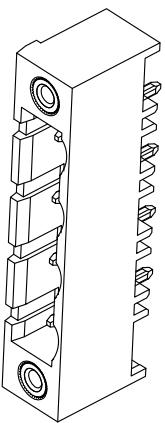

3D VIEW(REF.)
 SCALE: 1:2

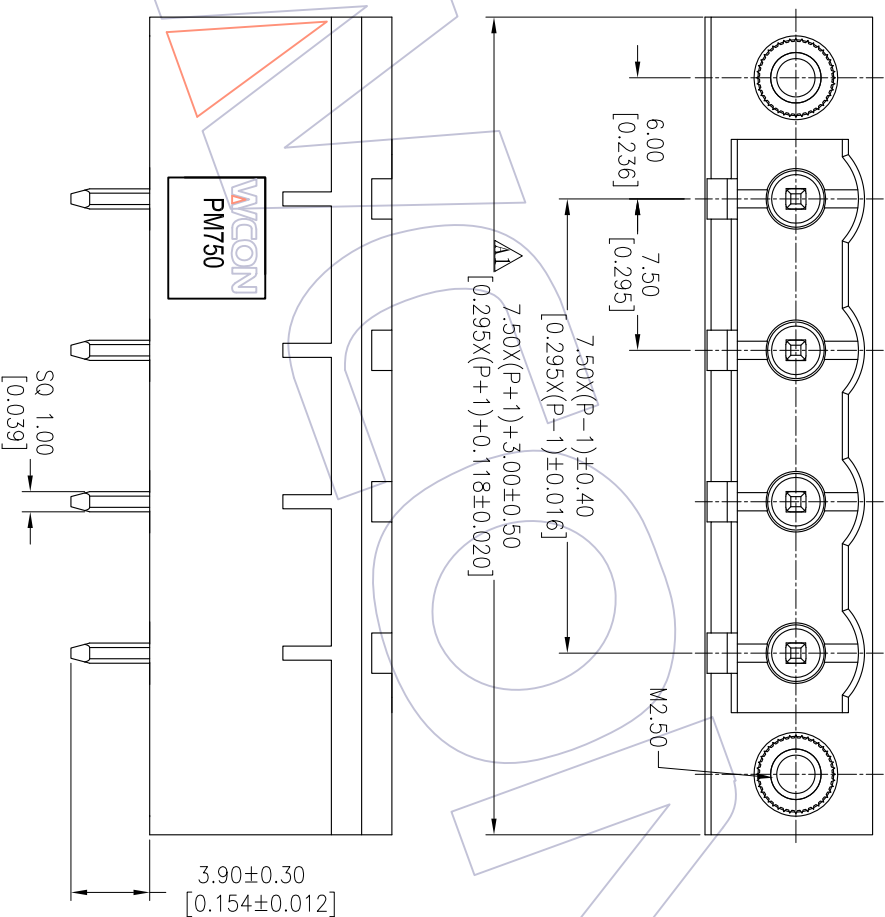

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

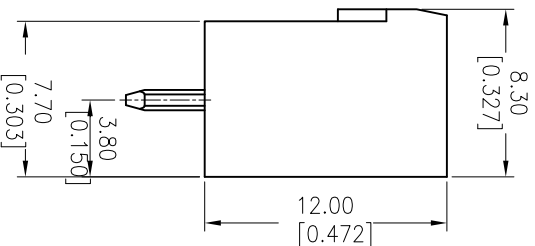

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2014/04/15	Modify	△	XX ±0.40	Allen	2014/04/15	mm	A4	PM750-1SXXASM2
A0	2013/11/06	NEW	—	XXX ±0.25	CHECK	DATE	inch	1/1	7.50mm Pitch Male Pluggable Terminal Blocks
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle DIM	APPROVE	DATE	SHEET	PROJ.	Customer NO.
1	2	3	4	5	6	7	8	9	10

WCON

WCON-Dongguan
 Http: www.wcon.com
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com