



NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 35MΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -55°C to +85°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT UL94V-0
 Front Shell: Steel NICKEL Plated Over Copper



Ordering Information

6320-XXX TI SX MN X 01

No. of Pins
 14 Pin
 20 Pin
 26 Pin
 36 Pin
 50 Pin
 68 Pin
 100 Pin

Contact Plating
 S2=5u"Gold/Tin
 S3=(0u"Gold/Tin
 S4=1st Gold/Tin
 S5=30u"Gold/Tin


Packing
 T=Tube
 A=Tray

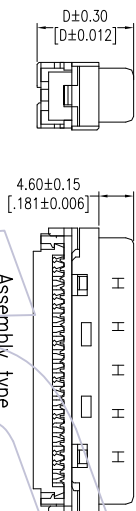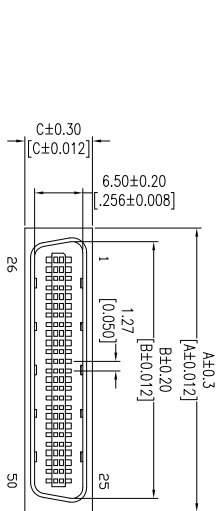

Assembly type
(With Hood)
Male type only


(50,68 pos)

Molded Type
(W/O Hood)
Male type only




Assembly type
(With Hood)
Male type only

(14,20,26,36,100 pos)



Molded Type
(W/O Hood)
Male type only

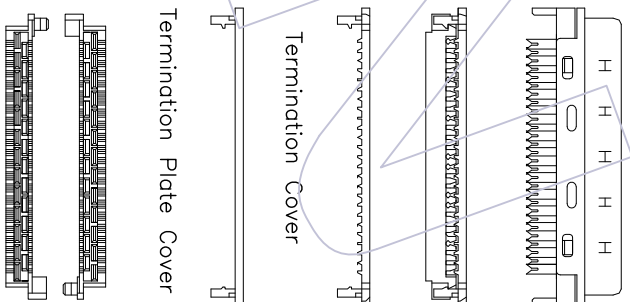

Termination Plate Cover

Termination Cover

Wire Holder

Positions	A	B	C	D
14	16.45	12.80	8.60	13.10
20	20.20	16.60	9.50	13.10
26	24.00	20.40	9.50	13.10
36	30.40	26.70	8.60	13.10
50	39.30	35.60	9.50	13.80
68	50.90	46.95	9.30	13.10
100	71.05	67.29	9.30	13.50

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	JHuang	2014/05/08	UNIT	mm	6320-XXXXTISXMNX01
X.XX	CHECK	DATE	SIZE	A4	TITLE: SCST 1.27mm RIBBON TYPE FOR CABLE
X.XXX	±0.15	DATE	SHEET	1/1	CONNECTOR I. D. C TYPE
Angle	± 3'	DATE	PROJ.		Customer NO.
DIM	TOL	DATE	PROJ.		

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

1 2 3 4 5 6 7 8 9 10