



NOTES:




Current Rating: 1.0A
 Voltage Rating: 250V AC, DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Contact Material: Phosphor Bronze
 Contact plating: Au Over Ni
 Insulator Material: PBT+30%G.F.(UL94V-0)

Ordering Information

5260-XX B P XX B N X 1

- No. of Pins: 10P 34P, 14P 40P, 16P 50P, 20P 60P, 26P 64P
- No. of Pins: A=With claspboard, B=Without claspboard
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S1=3u"Gold/Tin, S2=5u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Color: B=Black, U=Blue, G=Grey(427C), E=Grey(413C)
- Packaging: A=Tray, T=Tube

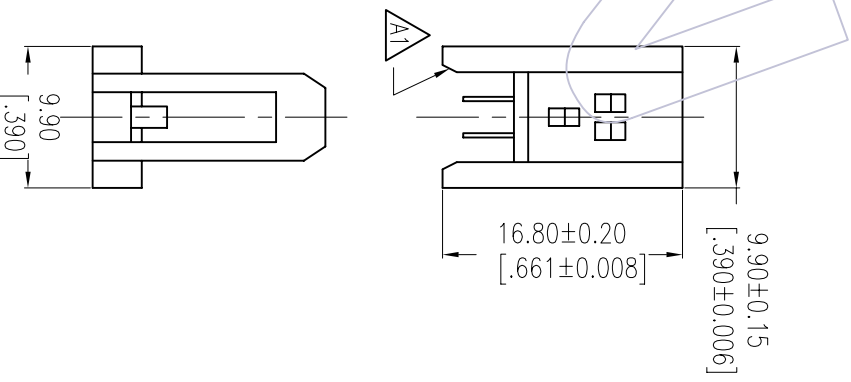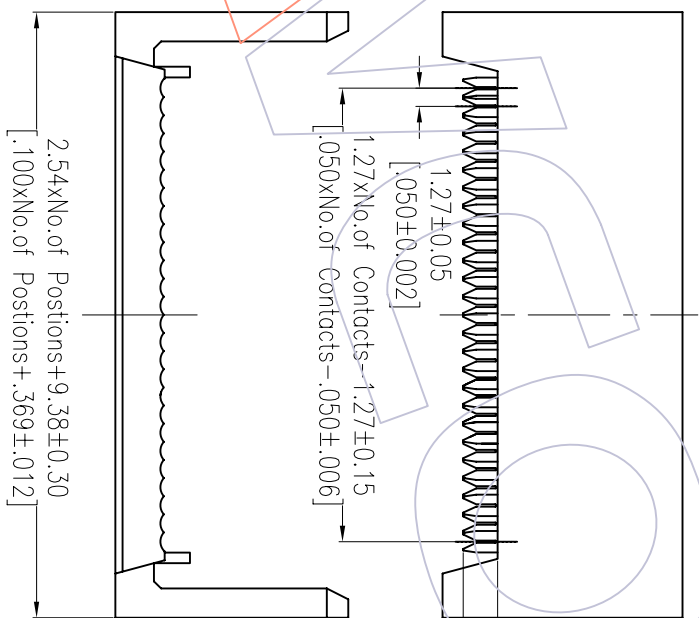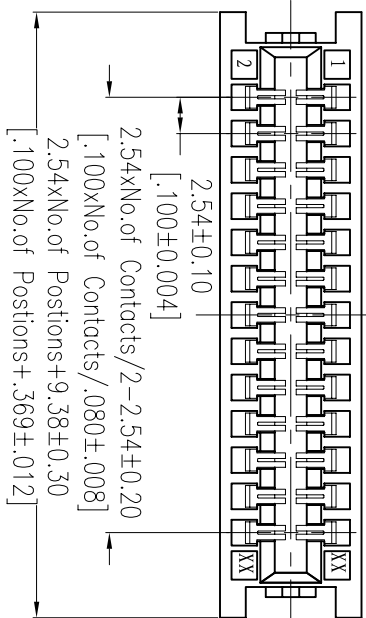

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	MYQ	11.10.28	SCALE	FIT	 WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	PART NO.	5260-XXBPXXBX1
A1	11/10/28	Modify drawing			X.X	DESIGN			UNIT	mm		SIZE	A4
A0	08/11/25	NEW			X.XXX	CHECK			SHEET	1/1		TITLE:	CE SOCKET CONNECTOR
					Angle	APPROVE			PROJ.		Customer NO.		

1 2 3 4 5 6 7 8 9 10