


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

Rated Current: 5.0A
Contact Resistance: 10mΩ max
Withstand Voltage: 1500V AC/Minute
Insulation Resistance: 1000MΩ min
Operation Temperature: -25°C to +85°C


Contact Material: Brass
Contact plating: Au or Sn over Ni
Insulator Material: PA66

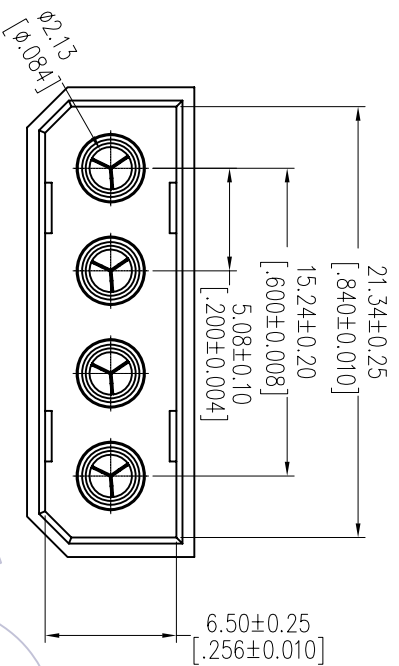

Ordering Information

WF5084 -WS 04 W 0 1

No. of pins — Contact Plating — Color — Packing
 S0=Gold Flash/Tin B=Black O=PE Bag
 S3=10u"Gold/Tin W=White A=Tray
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

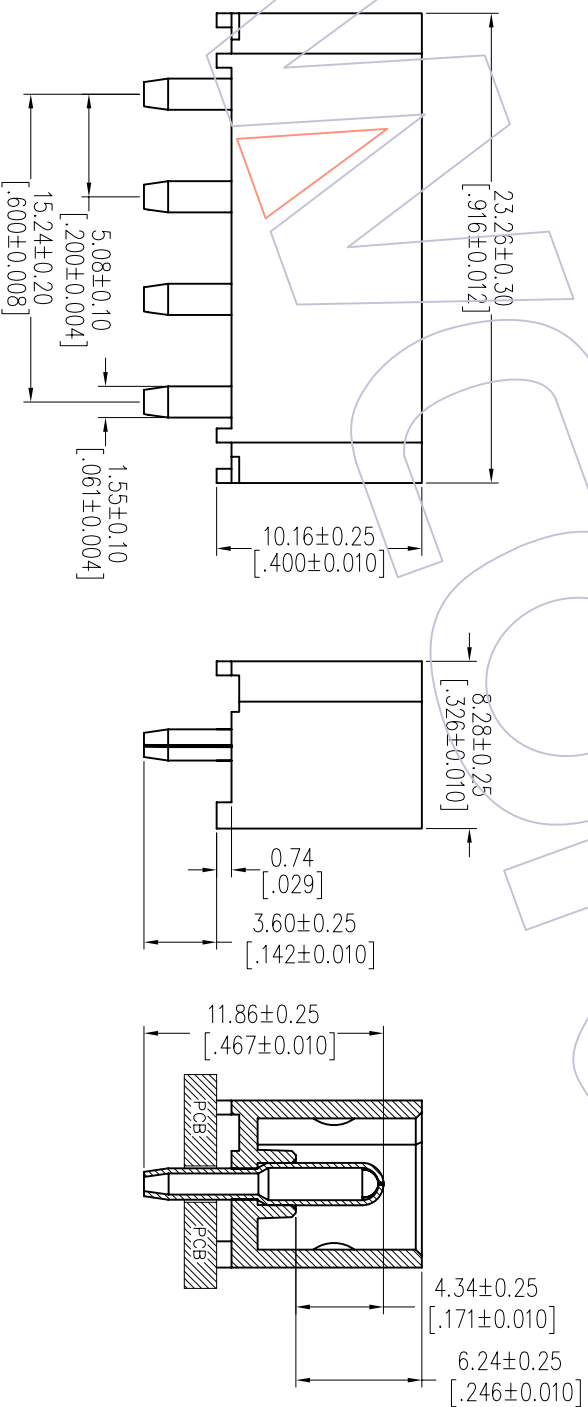

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
AO	2012/09/18	NEW		XX XX XXX Angle	JYHuang CHECK APPROVE	2012/09/18	UNIT mm A4	1/1	WF5084-WS04W01 TITLE: 5.08 WAFER 1*4P 180° DIP Customer NO.	
				±0.40 ±0.25 ±0.15 ± 3'						