

# HSF

**NOTES:**


Rated Current:18.0 AMP  
 Contact Resistance:8.0 milliohm Max  
 Withstand Voltage:2000 V AC/DC  
 Insulation Resistance:1000 Megohm min  
 Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)  
 Contact Material:Brass  
 Terminal Plating:  
 Matte Tin Plated Over Nickel


**Ordering Information:**

**P M 762- 1 R XX A SM 1**

M=Male Pitch 762=7.62 No. of Pins 02-20P Color A=Green SM=Matte Tin Series No.

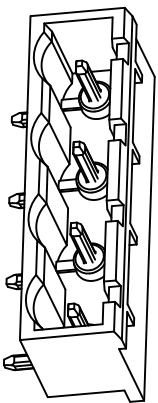

3D VIEW(REF.)  
 SCALE: 1:2

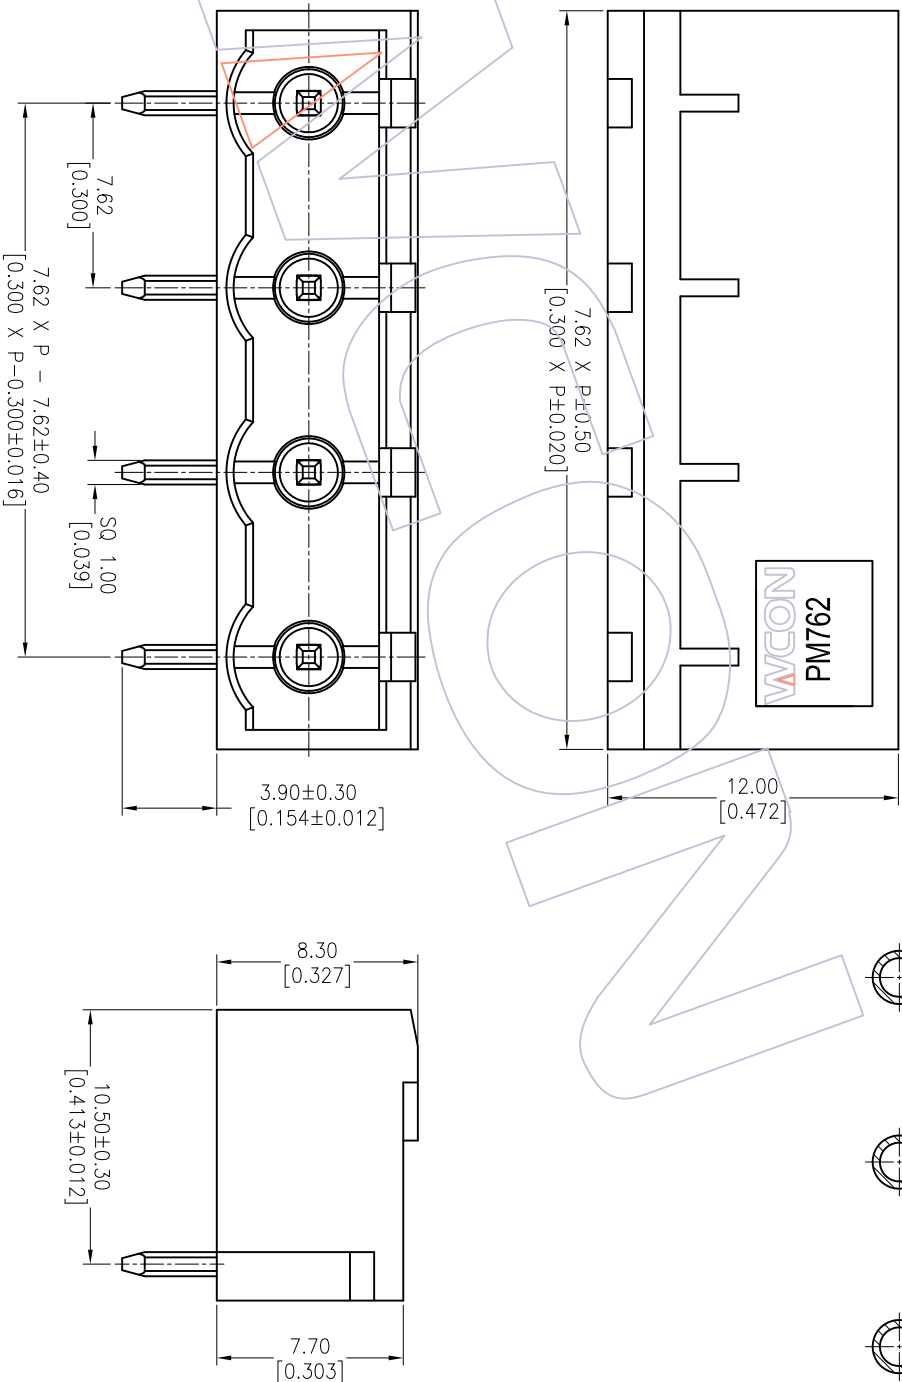

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX ±0.40		Tsingsn		2013/10/24		FIT		PM762-1RXXASMI	
XXX ±0.25		CHECK		DATE		UNIT		TITLE:	
XXXX ±0.15						mm		7.62mm Pitch Male	
Angle ± 3°		APPROVE		DATE		inch		Pluggable Terminal Blocks	
DIM TOL		PROJ.				A4		Customer NO.	
						1/1			
CHANGE									
MODIFICATION DESCRIPTION									
NEW									
DATE									
2013/10/24									
REV									
A0									

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com